

SEB5100 Series Storage Expansion Box



SUPPORTS ANY NVR5100 WITH UP TO 4.8 TB STORAGE, HOT-SWAPPABLE DRIVES

Product Features


- Expands Storage Capacity of a Pelco NVR5100 Series Network Video Recorder
- Plug-and-Play Configuration
- Hot-Swappable Hard Drives and Power Supplies
- Fault Tolerance and Performance Enhanced Through Use of RAID 5
- Storage Locking
- Fully Compatible with Pelco's Integrated Security Architecture
- System Diagnostics and Error Logging
- Full Over-the-Network Remote Control and Administration
- Redundant Power Supplies



The **SEB5100 Series** storage expansion box integrates seamlessly with NVR5100 network video recorders. Each **SEB5100** offers up to 4.8 TB of expanded online storage. Up to eight **SEB5100** units can be added to each NVR5100 to expand system storage capacity.

The **SEB5100 Series** is a premier network-based video storage system. It integrates seamlessly with other Pelco integrated security products to create a robust, secure, and expandable security platform.

The **SEB5100 Series** provides distributed, networked storage capability for Pelco-based security systems. It represents the state-of-the-art in scalability, features, and reliability. The **SEB5100 Series** represents a whole new generation of flexibility and integration for network-based video system recording. Designed for integration with all of Pelco's next generation networked security devices, the **SEB5100 Series** becomes the distributed system that satisfies all video and audio storage needs.

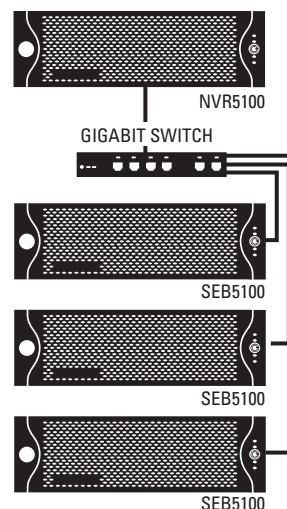

Designed with system reliability in mind, the **SEB5100 Series** provides performance enhancement and fault-tolerance by employing RAID 5 disk management across up to 12 hard drives. In addition, a hot drive swap feature is included that automatically configures new drives during installation. Worries are gone about poor data integrity across the recording platform. Diagnostics are systemized with other Endura™ products so that problems are reported to various network infrastructure-monitoring systems. Dual-redundant, hot-swappable power supplies round out the reliability features of the **SEB5100 Series**, ensuring maximum system uptime.

IMPORTANT NOTE: PLEASE READ. The network implementation is shown as a general representation only and is not intended to show a detailed network topology. Your actual network will differ, requiring changes or perhaps additional network equipment to accommodate the system as illustrated. Please contact your local Pelco Representative to discuss your specific requirements.

Endura distributed, network-based products are available only to certified dealers/integrators. Please contact your local sales representative for details on certification applications and requirements. Additional information on Endura products and certifications may be found at <http://www.pelco.com/endura>.



C1622 / REVISED 10-05



PELCO
DESIGNED
& BUILT



International Standards
Organization Registered Firm;
ISO 9001 Quality System



TECHNICAL SPECIFICATIONS

MODEL NUMBERS

Models	Streams*	Drives	Internal Storage	Video Storage
SEB5100-1500	Up to 48	6**	1.5 TB	1.22 TB
SEB5100-2400	Up to 48	6**	2.4 TB	1.95 TB
SEB5100-3000	Up to 48	12	3.0 TB	2.44 TB
SEB5100-4800	Up to 48	12	4.8 TB	3.9 TB

* Simultaneous full frame rate/full resolution input streams; actual number of streams matches NVR5100 model.

** All 6-drive models include 6 empty hard drive carriers.

SUPPLIED ACCESSORIES

6 power cords (2 USA standard, 2 European standard, and 2 UK standard)
Rack mount kit (brackets, rails, and hardware)

SYSTEM

Processor	Intel® Pentium® 4, 3.2 GHz
Internal Memory	512 MB DDR
Operating System	Linux®
User Interface	Remote operation via WS5050 or VCD5000
System Storage	40 GB IDE
Video Storage Capacity	Up to 3.9 TB
Interface	SATA, hot-swappable
RAID Level	5

NETWORK

Interface	2 Gigabit Ethernet RJ-45 ports (1000BaseT)
Security	2 modes: secure mode (device authentication) and unsecure mode

AUXILIARY INTERFACES

USB 2.0	3 high-speed USB 2.0 ports on rear panel
---------	--

FRONT PANEL INDICATORS/FUNCTIONS

Power	Blue
Hard Drive Activity	Yellow
Network Activity	Green
Network Status	Green, amber, red
Unit Status	Green, amber, red
Individual Drive Status	Green, red
Power Button	3 states
Configuration/Reset Button	4 states

POWER

Power Input	100-240 VAC, 50/60 Hz, autoranging
Power Supply	Internal, dual-redundant, hot-swappable
Cable Type	2, USA standard (117 VAC, 3 prongs, molded connector, 6 ft or 1.8 m cord) 2, European standard (220 VAC, 3 prongs, molded connector, 6 ft or 1.8 m cord) 2, UK standard (250 VAC, 3 prongs, molded connector, 6 ft or 1.8 m cord)

Power Consumption (maximum)

Input Voltage	Watts	BTU/H
100 VAC	427	1157
115 VAC	422	1143
220 VAC	405	1133

Each hard drive consumes approximately 13 W (21.7 VA) during normal operation.

Uninterruptible Power Supply (UPS)

Compatible with APC® Smart-UPS®, managed through the Endura product architecture

ENVIRONMENTAL

Operating Temperature	50° to 95°F (10° to 35°C)
Storage Temperature	-40° to 149°F (-40° to 65°C)
Operating Humidity	20% to 80% noncondensing
Maximum Humidity Gradient	10% per hour
Operating Altitude	-50 ft to 10,000 ft (-16 m to 3,048 m)
Operating Vibration	0.25 G at 3 Hz to 200 Hz at a sweep rate of 0.5 octave/minute

PHYSICAL

Construction	Steel cabinet
Finish	Front panel: gray metallic with black end caps Chassis: black matte finish
Dimensions	24.3" D x 17.0" W x 5.2" H (61.8 x 43.2 x 13.2cm)
Unit Weight	Empty (no installed storage) 51 lb (24 kg) Fully equipped (12 drives) 67 lb (31 kg)
Shipping Weight	Empty (no installed storage) 56 lb (26 kg) Fully equipped (12 drives) 73 lb (34 kg)
Mounting	Desktop (feet) or rack 3 RU per unit, 1 RU between units

CERTIFICATIONS AND REGULATIONS

- CE, Class A
- UL Listed
- UL Listed to Canadian safety standards
- FCC, Class A
- C-Tick

OPTIONAL ACCESSORIES

NVR5000PS	Replacement power supply
HD5000-250	Replacement 250 GB hard drive carrier
HD5000-400	Replacement 400 GB hard drive carrier
HDD1500UP	Video storage upgrade kit; includes six 250 GB hard drive carriers; adds 1.5 TB
HDD2400UP	Video storage upgrade kit; includes six 400 GB hard drive carriers; adds 2.4 TB

STANDARDS/ORGANIZATIONS

- Pelco is a member of the MPEG-4 Industry Forum
- Pelco is a member of the Universal Plug and Play (UPnP) Forum
- Pelco is a member of the Universal Serial Bus (USB) Implementers Forum
- Pelco is a contributor to the International Standards for Organization/ Electrotechnical Commission (ISO/IEC) Joint Technical Committee 1 (JTC1), "Information Technology," Subcommittee 29, Working Group 11
- Compliance, ISO/IEC 14496 standard (also known as MPEG-4)
- Compliant with International Telecommunication Union (ITU) Recommendation G.711, "Pulse Code Modulation (PCM) of Voice Frequencies"



Pelco Worldwide Headquarters:

3500 Pelco Way, Clovis, California 93612-5699 USA

USA & Canada Tel: (800) 289-9100 • FAX (800) 289-9150

International Tel: (559) 292-1981 • FAX (559) 348-1120

www.pelco.com

Pelco and the Pelco logo are registered trademarks of Pelco.

Endura is a trademark of Pelco.

APC and Smart-UPS are registered trademarks of American Power Conversion Corporation.

Intel and Pentium are registered trademarks Intel Corporation.

Linux is a trademark of Linus Torvalds.

Specifications subject to change without notice.

©Copyright 2005, Pelco. All rights reserved.