

Entraguard Gold

Integrated Telephone Entry System

ENTRAGUARD™ Gold



Numeric Mode



Alpha Mode

Radiant Keypad
(Shown With Hooded Enclosure)



Standard Keypad
(Shown Without Hooded Enclosure)

- Two different keypad and scrolling options - Standard and Radiant AlphaNumeric
- Alphanumeric, multi-color Radiant Keypad version provides for fast scrolling, no incandescent bulbs
- Stand-alone functionality or seamless integration with Keri's access control system and Doors software for real access control + telephone entry
- 4 line, 20 character per line soft white Supertwist LCD display, with up to three programmable scrolling messages
- 750 tenant capacity on all units, customer doesn't pay for extra memory capacity
- Up to 6 digit directory code, 7-15 digit phone numbers
- Networkable to manage multiple doors via RS-485
- Handset, Flush Mount Kit, Hooded Enclosure, Camera, No Phone Line options

Keri continues the prestigious *Entraguard™* telephone entry tradition with the new *Entraguard Gold*, a huge step forward for the industry in terms of economy and function. This new unit provides the best telephone entry/access control marriage available by letting the Entraguard function as a node on a PXL controller network and putting both functions under the acclaimed Doors software umbrella. Each Entraguard Gold has two extra relay outputs that can be used in a variety of ways, including turning on a lobby light, unlocking an interior door, etc., by tone commands from the tenant's location or based on an access granted decision. An on-board modem is also included for remote programming.

The Standard Keypad version contains a waterproof Class IP65 rated keypad, and maintenance free solid state lighting. The equally durable multi-color Radiant Keypad with AlphaNumeric searching makes it easy for the visitor to locate tenants in a large directory. The unit is designed for durability and weather resistance with a tough 14 gauge steel enclosure and powder-coated finish. Additionally, the radiant keypad has no mechanical or moving parts to wear out. Both units are available with an optional flush mount kit, hooded enclosure, or hand set.



1530 Old Oakland Road, Suite 100
San Jose, CA 95112 USA
(800) 260-5265 • (408) 451-2520 • Fax (408) 441-0309
e-mail: sales@kerisys.com web: www.kerisys.com

DATA SHEET

Integrated Telephone Entry System

Entraguard Gold

Entraguard Gold

Integrated Telephone Entry System

Standard Keypad

-High quality, waterproof-rated keypad (IP-65 rating)

Optional AlphaNumeric Radiant Keypad for Fast Name Locate

- Spell tenant's name for fast locate in large population directories
- Low maintenance
- Wear not a function of usage
- Direct dial or scroll to locate tenant's dial code

Real Integrated Access Control

- Telephone unit connects to a Keri access control network
- All features and functions of Keri's acclaimed *Doors* software
- PC programmable
- 32 time zones, auto lock and unlock feature, unlimited access groups
- 3 Holiday schedules
- 3600 event buffer
- Comprehensive reports
- Available in French, Italian, and Spanish language (more coming)

Three 80 Character Programmable Scrolling Messages for 4 Line Electronic Display

- Automatic message rotation, programmable cycle time

Do Not Disturb Feature

- Programmable per tenant using time zones

"Do Not Display" Tenant Name Function

- Selectable on a per tenant basis

On-Board Modem Can Be Used For Programming and Calling Telephone Entry Unit


Two Extra Programmable Relays to Control Other Points

Up to 6 Digit Directory Code Length

Shared Capacity of up to 6 Units on One Telephone Line

Remote Programming via Built-In Modem

- Fast, does not require connection to each unit on the line, uses RS-485 system networking

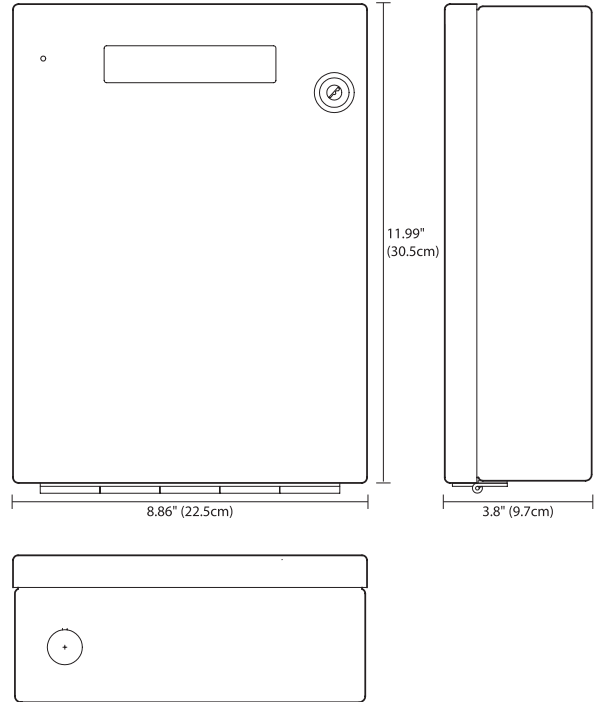

When choosing which Entraguard model to use, the AlphaNumeric Radiant Keypad vs. the Standard Keypad, careful consideration should be given to each location's ambient lighting. The Radiant Keypad may not appear bright enough in direct sunlight, so for those locations that will be in prolonged direct sunlight, the standard keypad may be a better choice.

When using the Entraguard products in a dial-up application, Keri requires the use of an approved modem. Check the web site for the latest list, or call Keri customer service.

General Features

Surface or recess mount
 Weather and vandal resistant
 Postal lock provision
 Strikes and out
 Non-volatile memory
 Built-in surge protection plus surge suppression kit
 Programmable talk time
 Alarm shunt
 Door forced open and door held open alarms
 Pulse or tone dialing
 Adjustable volume control
 Maintenance free
 Mylar speaker with superior sound

Specifications*

Capacity: Up to 750 Tenants
 Outputs: Door Relay, Alarm Relay
 2 additional programmable relays
 Operating Temperature: +5° to 140°F
 (-15° to 60°C)
 with heater: -20°F to 140°F
 (-29° to 60°C)
 Input Power: 12 VDC@750mA
 Size: 12.00H" x 8.86W" x 3.8"D
 (30.5cm x 22.5cm x 9.7cm)
 Weight: 8.7 lbs. (3.95kg)
 Material: 14 gauge steel
 Finish: Metallic Powder Coat
 Color: Bronze
 Warranty: 2 Years

Options

Handset
 Recess Mount Kit
 Hooded Enclosure Kit
 No Phone Line
 Heater (for applications below 5°F/-15°C)
 Camera

*Specifications subject to change without notice.

Presented By:



(800) 260-5265 • (408) 451-2520 • Fax (408) 441-0309

October 2004

P/N: 01754-001